




INSTALLATION OF COVER STRIP

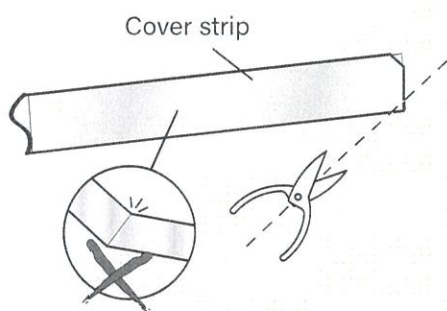

- 1** Cut the cover strip end to bevel.
Do not bend the cover strip!

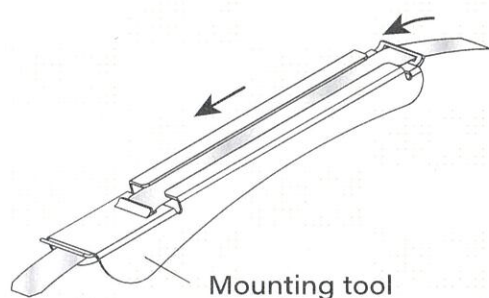

- 2** By the arrow direction, put the band through the mounting tool.

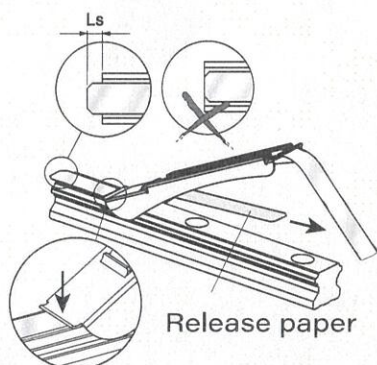


- 3-1** Position the cover strip with a overhang length L_s (see the Table 1) on the rail end.

- 3-2** Press the front of mounting tool and pull it along the rail. Use another hand to pull the release paper. Carefully pull the release paper and do not pull it apart.

- ⚠ The mounting speed must be uniform and not too fast.
- ⚠ Carefully clean all th mounting surface and workplace before mounting.


Table 1

Model	15	20	25	30	35	45
L_s (mm)	5	6	8	10	11	14

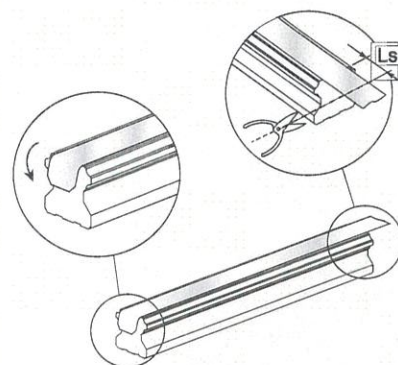


- 4-1** Make the overhang L_s (see the Table 1) and cut the unnecessary.

- 4-2** Angle the overhang down flush with the rail end.

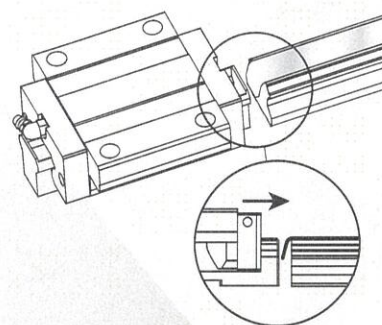

- 5** Position the carriage, with its jig inserted, at one end of the rail. Push the carriage onto the rail and the jig will be pushed out of the carriage by the rail.

Remove the carriage, slide the carriage off the rail and onto the jig.

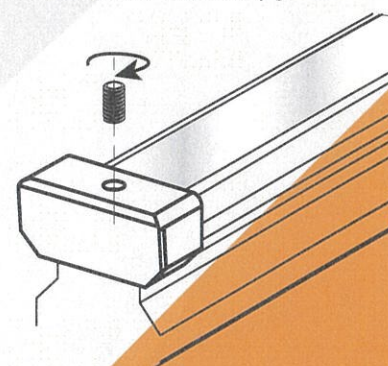

- 6** Position the protective cap at the end of rail and tighten the setscrew.

FINISH

